

Datasheet

2.5" SATA SSD

3MG2-P_AES series

- 2.5" SATA III solution for industrial field
- Hardware-based AES 256bits key
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- Compliant with TCG OPAL 2.0
- Compliant with IEEE 1667
- 7mm height mechanical design
- iSMART disk health monitoring




Introduction

Innodisk 2.5" SATA SSD 3MG2-P is SATA III 6Gb/s flash based disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. Innodisk 2.5" SATA SSD 3MG2-P is designed with AES engine, which is built-in the controller. When controller receives the data package from host, AES engine encrypts the data package and save the encrypted data into NAND flash. Thus, unauthorized personal has no access to decrypt the data in NAND flash. Innodisk 2.5" SATA SSD 3MG2-P supports several standard features, including TRIM, NCQ, and S.M.A.R.T and compliant with TCG OPAL 2.0 and IEEE 1667.

2.5" SATA SSD

3MG2-P series

Drawing

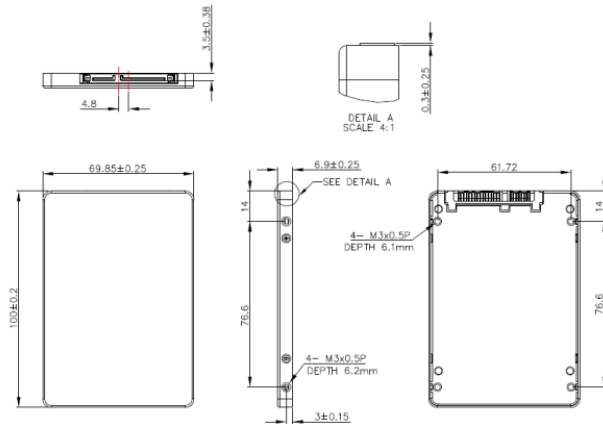

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	64GB~1TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	520 / 360 MB/s
4KB Random (QD32) R/W (IOPS)	70,000/64,000
Max. Power Consumption	6 W (5V x 1.2A)
Thermal Sensor	√
External DRAM Buffer	√
H/W Write Protect	Optional
iCell	Optional
ATA Security	√
S.M.A.R.T.	√
DEVSLP Mode	√ (min. power consumption 3mW)
Slumber Mode	√ (min. power consumption 30mW)
Dimension (WxLxH)	70.0 X 100.0 X 6.8 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Performance based on CystalDiskMark 3.03 with file size 1000MB	

Ordering Information (Please refer to TPS for detail)

Operation Temp.	64GB	128GB	256GB	512GB	1TB
Standard Grade (0°C ~ +70°C)	DGS25-64GD82SCAQN(P)	DGS25-A28D82SCAQN(P)	DGS25-B56D82SCAQN(P)	DGS25-C12D82SCAQN(P)	DGS25-01TD82SCAQN(P)
Industrial Grade (-40°C ~ +85°C)	DGS25-64GD82SWAQN(P)	DGS25-A28D82SWAQN(P)	DGS25-B56D82SWAQN(P)	DGS25-C12D82SWAQN(P)	DGS25-01TD82SWAQN(P)

Note: C stands for Toshiba flash, P is optional for icell

Contact us for more information about the 2.5" SATA SSD 3MG2-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City, Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-(0)40-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2014 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

20151120

innodisk

www.innodisk.com